# BODY LOWER BACK PANEL (ASSY)



F25912A

Symbol meaning

| | | |
|---|---|---|
| REMOVAL | : Remove Weld Points | |
| INSTALLATION | : Spot Weld | : MIG Plug Weld |

F25912B

**REMOVAL·INSTALLATION**

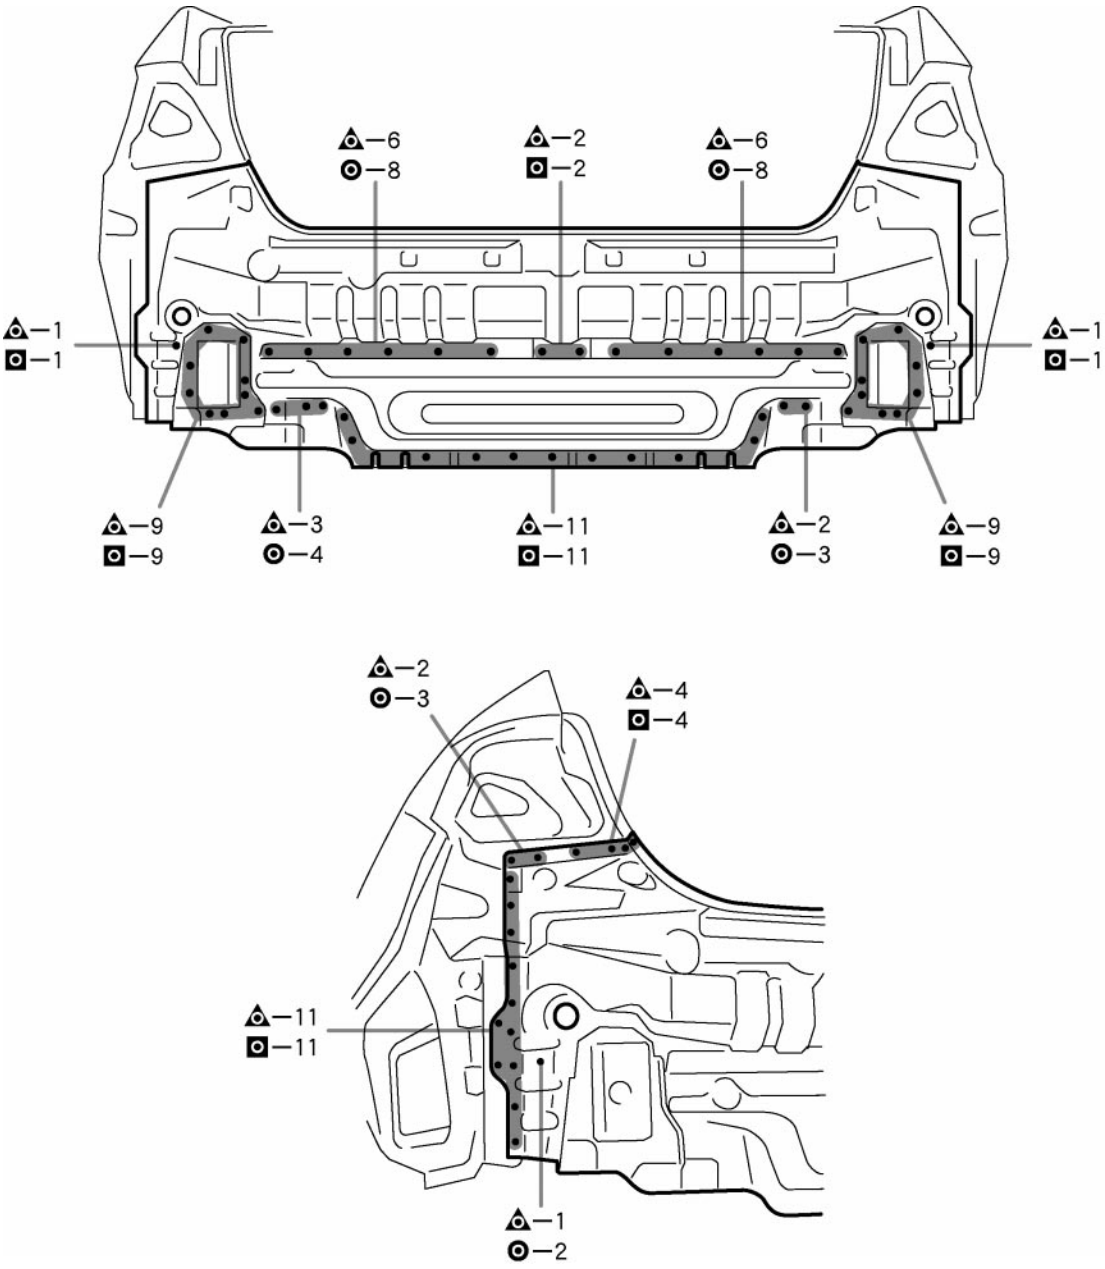


F25912

**INSTALLATION POINT**

1 Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
2 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint·coating)
3 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.